PART NUMBER

KAD177292

REV.		INITIAL

## **Electrical Data**

1. Characteristic impedance: 50Ω

2. Frequency range: 0~3GHz


3. Temperature range :-55∼+155°C

4. Insulation Resistance ≥5000MΩ

5. Mechanical Durability: 500 Cycles

6. Withstand voltage ≥1500V

7. VSWR∶≤1.3

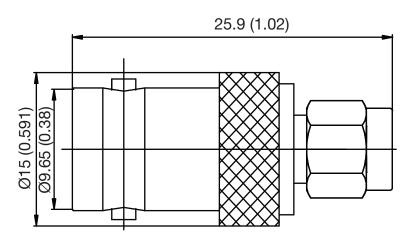

## **H** Konnect RF

540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

PART NUMBER <b>KAD177292</b>		Adapter - Between Series BNC Female Jack to SMA Male Plug		
DESIGNS IS T	SIGNATURE  X  IG INCLUDING THE THE PROPERTY OF AND IS NOT TO	Materials  Body  Male Contact  Crimp Sleeve  Insulators	Brass Phosphor Bronze Brass PTFE	Nickel Plated Gold Plated Nickel Plated
BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.		Seals	Silicone Rubber	