.19 [4.8] Max.

Panel Thickness


Electrical Data

Impedance Frequency Range 50 Ohm DC - 40 GHz


VSWR

DC - 18 GHZ = 1.10:1 Max. 18 - 26.5 GHz = 1.20:1 Max.

26.5 - 40 GHz = 1.30:1 Max.

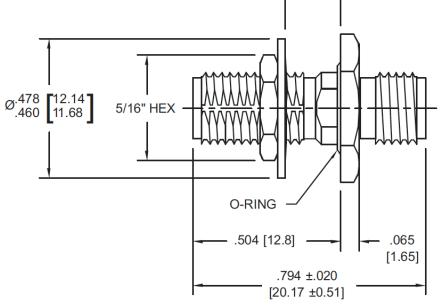

RoHS Compliant



H Konnect RF

540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887 CAGE CODE SIGNATURE

664U0 X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE

WITHOUT OUR APPROVAL.

DESCRIPTION

Adapter - In-Series - 2.9mm Female Jack to Female Jack - Bulkhead Mount

Materials

Body Center Contact Nut and Washer O-Ring Stainless Steel Be-Cu Stainless Steel

Silicone Rubber

Passivated Gold Plated Passivated