




CAM-IPM-13X-DNPC

H.264 CCD IP Box Camera, 1.3 Megapixel (1280 x 960), 2.8~12 mm Varifocal Lens, 12 VDC, PoE



Aventura's H.264 IP network cameras utilize a high performance 1/3" progressive scan CCD sensor and Texas Instruments' advanced DSP for reliability and true performance in an all day/night situations. Multiple connection ports support both IP (digital) and composite (analog) video outputs. Advanced H.264 video codec offers high resolution and real time recording while conserving network bandwidth.

- Embedded OS
- TI Davinci hardware compression
- 1 channel H.264 video compression, real time
- 1 channel audio compression
- 1 BNC output
- High Resolution Video: 1280 x 960Pixels
- 4CIF/DCIF/2CIF/CIF/QCIF real time compression
- Dual compression stream
- Motion detection
- SD Card for local recording
- Variable bit rate and variable frame rate
- Internet Explore Web Client for network previewing
- Watermarking
- e-PTZ Function
- Sensor input and alarm output
- Support Voice over IP function
- Compatible with current SDK and client software

© Aventura Technologies



- H.264 SVC dual stream video
- Real-time (30 FPS)
- 1280 x 960 (1.3 megapixel)
- 2.8~12 mm varifocal lens
- Motion detection/alarm
- SD card support
- 12 VDC PoE compliant


SPECIFICATIONS

CAMERA	
Image Sensor	CCD (Progressive scan)
Image Sensor Size	1/3"
Megapixel Sensor	Yes
Sensor Size in Megapixel	1.3
Min. Sensitivity (day)	Color (day) 0.1 lux at f1.2
Min. Sensitivity (night)	B&W (night) 0.1 lux at f1.2
VIDEO	
Day/Night (Electronic)	Yes
Maximum Video Resolution	1280 x 960
Frames Per Second NTSC/PAL	15 FPS / 12 FPS (1280 x 960) 30 FPS / 25 FPS (1280 x 720)
Video Output	16K~2M (8 Mbps max)
IR Cut Filter	Yes
LENS	
Focal Length	2.8~12 mm
Varifocal	Yes
Aperture	f1.0
Lens Mount	C/C S
Auto Iris	Yes
COMPRESSION	
Compression Type	H.264 SVC dual stream
AUDIO	
Audio Support	Yes
Two-Way Audio	Yes
Built-In Microphone	---
Built-In Speaker	---
SYSTEM INTEGRATION	
Video Motion Detection	Yes
Audio Detection	Yes
Alarm Inputs/Outputs	1 input / 1 relay output
ePTZ	Yes
SD Card Local Storage	Yes
Protocol Support	TCP/IP, HTTP, DHCP, DNS, RTP/RTCP, PPPoE
Power Over Ethernet	Class 3
Wireless	---
SECURITY	
Multi-Level Password	Yes
HTTPS Encryption	Yes
IP Address Filtering	Yes
IEEE 802.1X	Yes
ENVIRONMENTAL	
Operation Temperature	14°F to 140°F (-10°C to 60°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Operating Humidity	Up to 95%
Ingress Protection Rating (IEC 60529)	---

AVAILABLE MODELS

Part number	Description
CAM-IPM-13X-DNPC	H.264 IP box camera, 1280 x 960, 2.8~12 mm varifocal lens, 1.3 megapixel, 12 VDC/24 VAC, PoE

© Aventura Technologies

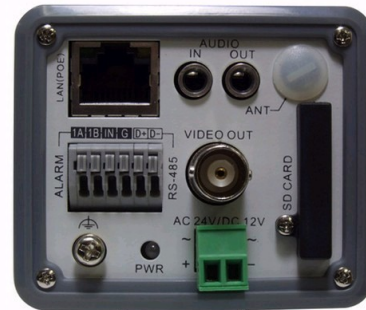

Aventura - World Headquarters
 180 Adams Ave. Hauppauge, NY 11788 USA
 Tel: 631-300-4000 | Fax: 631-434-7000
www.aventuracctv.com

Aventura and the Aventura logo are registered trademarks of Aventura Technologies, Inc. Specifications subject to change without notice. ©Copyright 2010. All rights reserved

CAM-IPM-13X-DNPC

Rev: 070910

Weatherproof	---
Vandal Proof	---
ACCESSORIES	
Bracket	Optional
Remote Control	---
ELECTRICAL	
Video Out	Composite signal (1Volt p-p 75Ω)
Signal Connector	BNC
Input Voltage	12 VDC/PoE
Current Draw	350 mA
Power Consumption	4 Watts (10 Watts IR cut filter on)
PHYSICAL	
Dimensions (W x H x D)	6.20" x 2.48" x 2.55" (157.5 x 63 x 64.8 mm)
Weight	1.3 lb (590 g)
Housing Material	Zinc
Housing Color	White
Camera Mounting	Wall/ceiling
REGULATORY	
Regulatory Type	CE, FCC, UL
Warranty (Effective Jan 1, 2009)	
3 Years	