



# CAM-IPM-5X-DNP

H.264 IP Box Camera, 5 megapixel (2560x 1920), 2.8-12mm VF Lens, True Day/Night, PoE

**DATUM**  
series

Aventura's H.264 IP network cameras utilize a high performance progressive scan CMOS sensor and Texas Instruments' advanced digital signal processor. The state-of-the-art DSP technology assures the ultimate in performance in the most challenging environmental conditions. Multiple connection ports support both IP (digital) and composite (analog) video outputs. Advanced H.264 video codec offers high definition resolution and real time recording while conserving network bandwidth. Aventura IP solutions are designed for the enterprise and are ONVIF compliant.

- 5.0 Megapixel Resolution (2560x1920)
- Progressive Scan CMOS Sensor
- True Day/Night, Built in IR Cut Filter
- Dual H.264 compression stream
- Motion detection/Watermarking
- DS Slot/Alarm/Sensor Inputs/outputs
- POE (Power Over Ethernet)
- ONVIF Compliant
- ePTZ Support
- Motion detection Support
- VOIP Support
- Watermarking
- Client and Web Browser Software Included
- SDK Available

## SPECIFICATIONS

CAMERA	
Image Sensor	Progressive Scan CMOS
Image Sensor Size	1/2.5"
Megapixel Sensor	Yes
Sensor Size in Megapixel	5.0
Min. Sensitivity (day)	Color (day) 0.5 lux at f1.2
Min. Sensitivity (night)	B&W (night) 0.08 lux at f1.2
VIDEO	
Day/Night (Electronic)	Yes
Maximum Video Resolution	2560 x 1920
Frames Per Second NTSC/PAL	60 Hz: 7.5 FPS (2560x1920), 15 FPS (2048x1536), 30 FPS (1920x1080), 30 FPS (1280x720) 50 Hz :6 FPS (2560x1920), 12.5 FPS (2048x1536), 25 FPS( 1920x1080), 25 FPS (1280x720)
Video Output	32K ~ 16 Mbps
IR Cut Filter	Yes
LENS	
Focal Length	2.8-12 mm
Varifocal	Yes
Aperture	f1.2
Lens Mount	C/CS
Auto Iris	Yes
COMPRESSION	
Compression Type	H.264 SVC dual stream
AUDIO	
Audio Support	Yes
Two-Way Audio	Yes
Built-In Microphone	---
Built-In Speaker	---
SYSTEM INTEGRATION	
Video Motion Detection	Yes
Audio Detection	Yes
Alarm Inputs/Outputs	1 input / 1 relay output
ePTZ	Yes
SD Card Local Storage	Yes - Up to 32GB
Protocol Support	TCP/IP, HTTP, DHCP, DNS, RTP/RTCP, PPPoE (FTP, SMTP, NTP, SNMP optional)
Power Over Ethernet	Class 1
Wireless	---
SECURITY	
Multi-Level Password	Yes
HTTPS Encryption	Yes

© Aventura Technologies




- 5.0 Megapixel Resolution (2560x1920)
- Progressive Scan CMOS Sensor
- True Day/Night, Built in IR Cut Filter
- Dual H.264 compression stream
- Motion detection/Watermarking
- DS Slot/Alarm/Sensor Inputs/outputs
- POE (Power Over Ethernet)
- ONVIF Compliant

## AVAILABLE MODELS

Part number	Description
CAM-IPM-5X-DNP	H.264 IP Box Camera, 5 megapixel (2560x 1920), 2.8-12mm VF Lens, True Day/Night, PoE

© Aventura Technologies

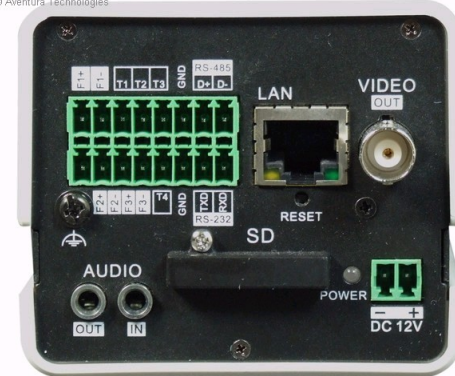

**Aventura - World Headquarters**  
180 Adams Ave. Hauppauge, NY 11788 USA  
Tel: 631-300-4000 | Fax: 631-434-7000  
[www.aventuracctv.com](http://www.aventuracctv.com)

Aventura and the Aventura logo are registered trademarks of Aventura Technologies, Inc. Specifications subject to change without notice. ©Copyright 2011. All rights reserved

**CAM-IPM-5X-DNP**

Rev: 051711

Page 1 of 2

IP Address Filtering	Yes
IEEE 802.1X	Yes
<b>ENVIRONMENTAL</b>	
Operation Temperature	14°F to 140°F (-10°C to 60°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Operating Humidity	Up to 95%
Ingress Protection Rating( IEC 60529)	----
Weatherproof	----
Vandal Proof	----
<b>ACCESSORIES</b>	
Bracket	Optional
Remote Control	----
<b>ELECTRICAL</b>	
Video Out	Composite signal (1Volt p-p 75Ω)
Signal Connector	RJ45/BNC
Input Voltage	12 VDC / PoE
Current Draw	1 A
Power Consumption	5 Watts (up to 10 Watts with ICR on)
<b>PHYSICAL</b>	
Dimensions (W x H x D)	6" x 2.48" x 3" (154.5 x 68 x 77.5 mm)
Weight	2 lb (1000 g)
Housing Material	Zinc
Housing Color	White
Camera Mounting	Wall/ceiling
<b>REGULATORY</b>	
Regulatory Type	CE, FCC, UL
<b>Warranty (Effective Jan 1, 2009)</b>	
	3 Years