



# FBR-2X1FE1FX-SFP

Dual 10/100 Mbps Ethernet 2-Port Media Converter, SFP Optical Ports

## STANDARD FEATURES

- 10/100 Mbps Ethernet
  - 10/100 BASE-T/TX electrical port
  - 100 BASE-LX optical port
- Electrical port supports Auto-Negotiation for 10 Mbps or 100 Mbps, full duplex or half duplex data
  - Optical port supports 100 Mbps full duplex data
    - Automatic MDI/MDI-X crossover
- Utilizes standard SFP optical modules for a choice of fiber type, number of fibers, and transmission distance
  - Transparent to data encoding
    - Hot-Swappable
  - No in-field optical adjustments required
    - IEEE 802.3 compliant
    - Lifetime Warranty

## SPECIFICATIONS

### DATA

Data Interface	Ethernet
	10/100 Mbps
Data Rate	IEEE 802.3 Compliant Full Duplex or Half Duplex Electrical Port Full Duplex Optical Port
Ethernet Connector	RJ-45

### FIBER

Number of Fibers Required	Depends on choice of SFP module
Type of Fiber	Depends on choice of SFP module
Type of Optical Connector	Depends on choice of SFP module
Wavelengths Used (Fwd./Rvrs.)	Depends on choice of SFP module
Optical Power Budget	Depends on choice of SFP module
Maximum Distance (miles (km))	Depends on choice of SFP module

### ELECTRICAL

Power:	Surface Mount: 12 VDC @ 800 mA Rack Mount: 12 VDC @ 800 mA (powered by card cage power supply)
Current Protection	Automatic Resettable Solid-State Current Limiters
Power Connector	Terminal Block with Screw Clamps
Hot-Swappable in Rack	Yes

### INDICATORS

Indicators	Optical Link/Data Activity Electrical Link/Data Activity Electrical Speed Power
------------	--

### MECHANICAL

Overall Size	6.5" x 6" x 1" (165 x 152 x 25.4 mm)
Number of Rack Slots	1
Unit Weight	<2 lb/0.9 kg
Shipping Weight	<2 lb/0.9 kg

### ENVIRONMENTAL

Operating Temperature	-4 0°C to +75°C
Storage Temperature	-4 0°C to +85°C
Relative Humidity	0% to 95% non-condensing
MTBF (hours)	> 100,000 hours


### COMPLIANCE

Safety Standards Unit Complies With	UL/EN60950-1
EMC Standards Unit Complies With	FCC part 15, EN55022, EN55024
Laser Standards Unit Complies With	FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J

### Warranty (Effective Jan 1, 2009)

Limited Lifetime

© Aventura Technologies

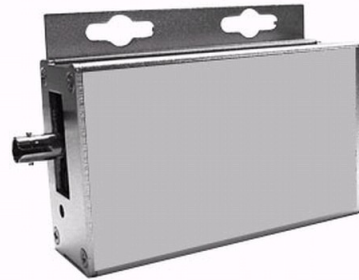

- Two Independent Transceivers In One Enclosure
- 10/100 Mbps Ethernet
- One or Two Fibers, Based on SFP Module
- Multimode or Single Mode Fiber, Based on SFP Module
- Wide Operating Temperature Range

## AVAILABLE MODELS

Part number	Description
FBR-2X1FE1FX-SFP	Dual 10/100 Mbps Ethernet 2-Port Media Converter, SFP Optical Ports